


LED GROW LIGHT

LovePlant
shine and grow

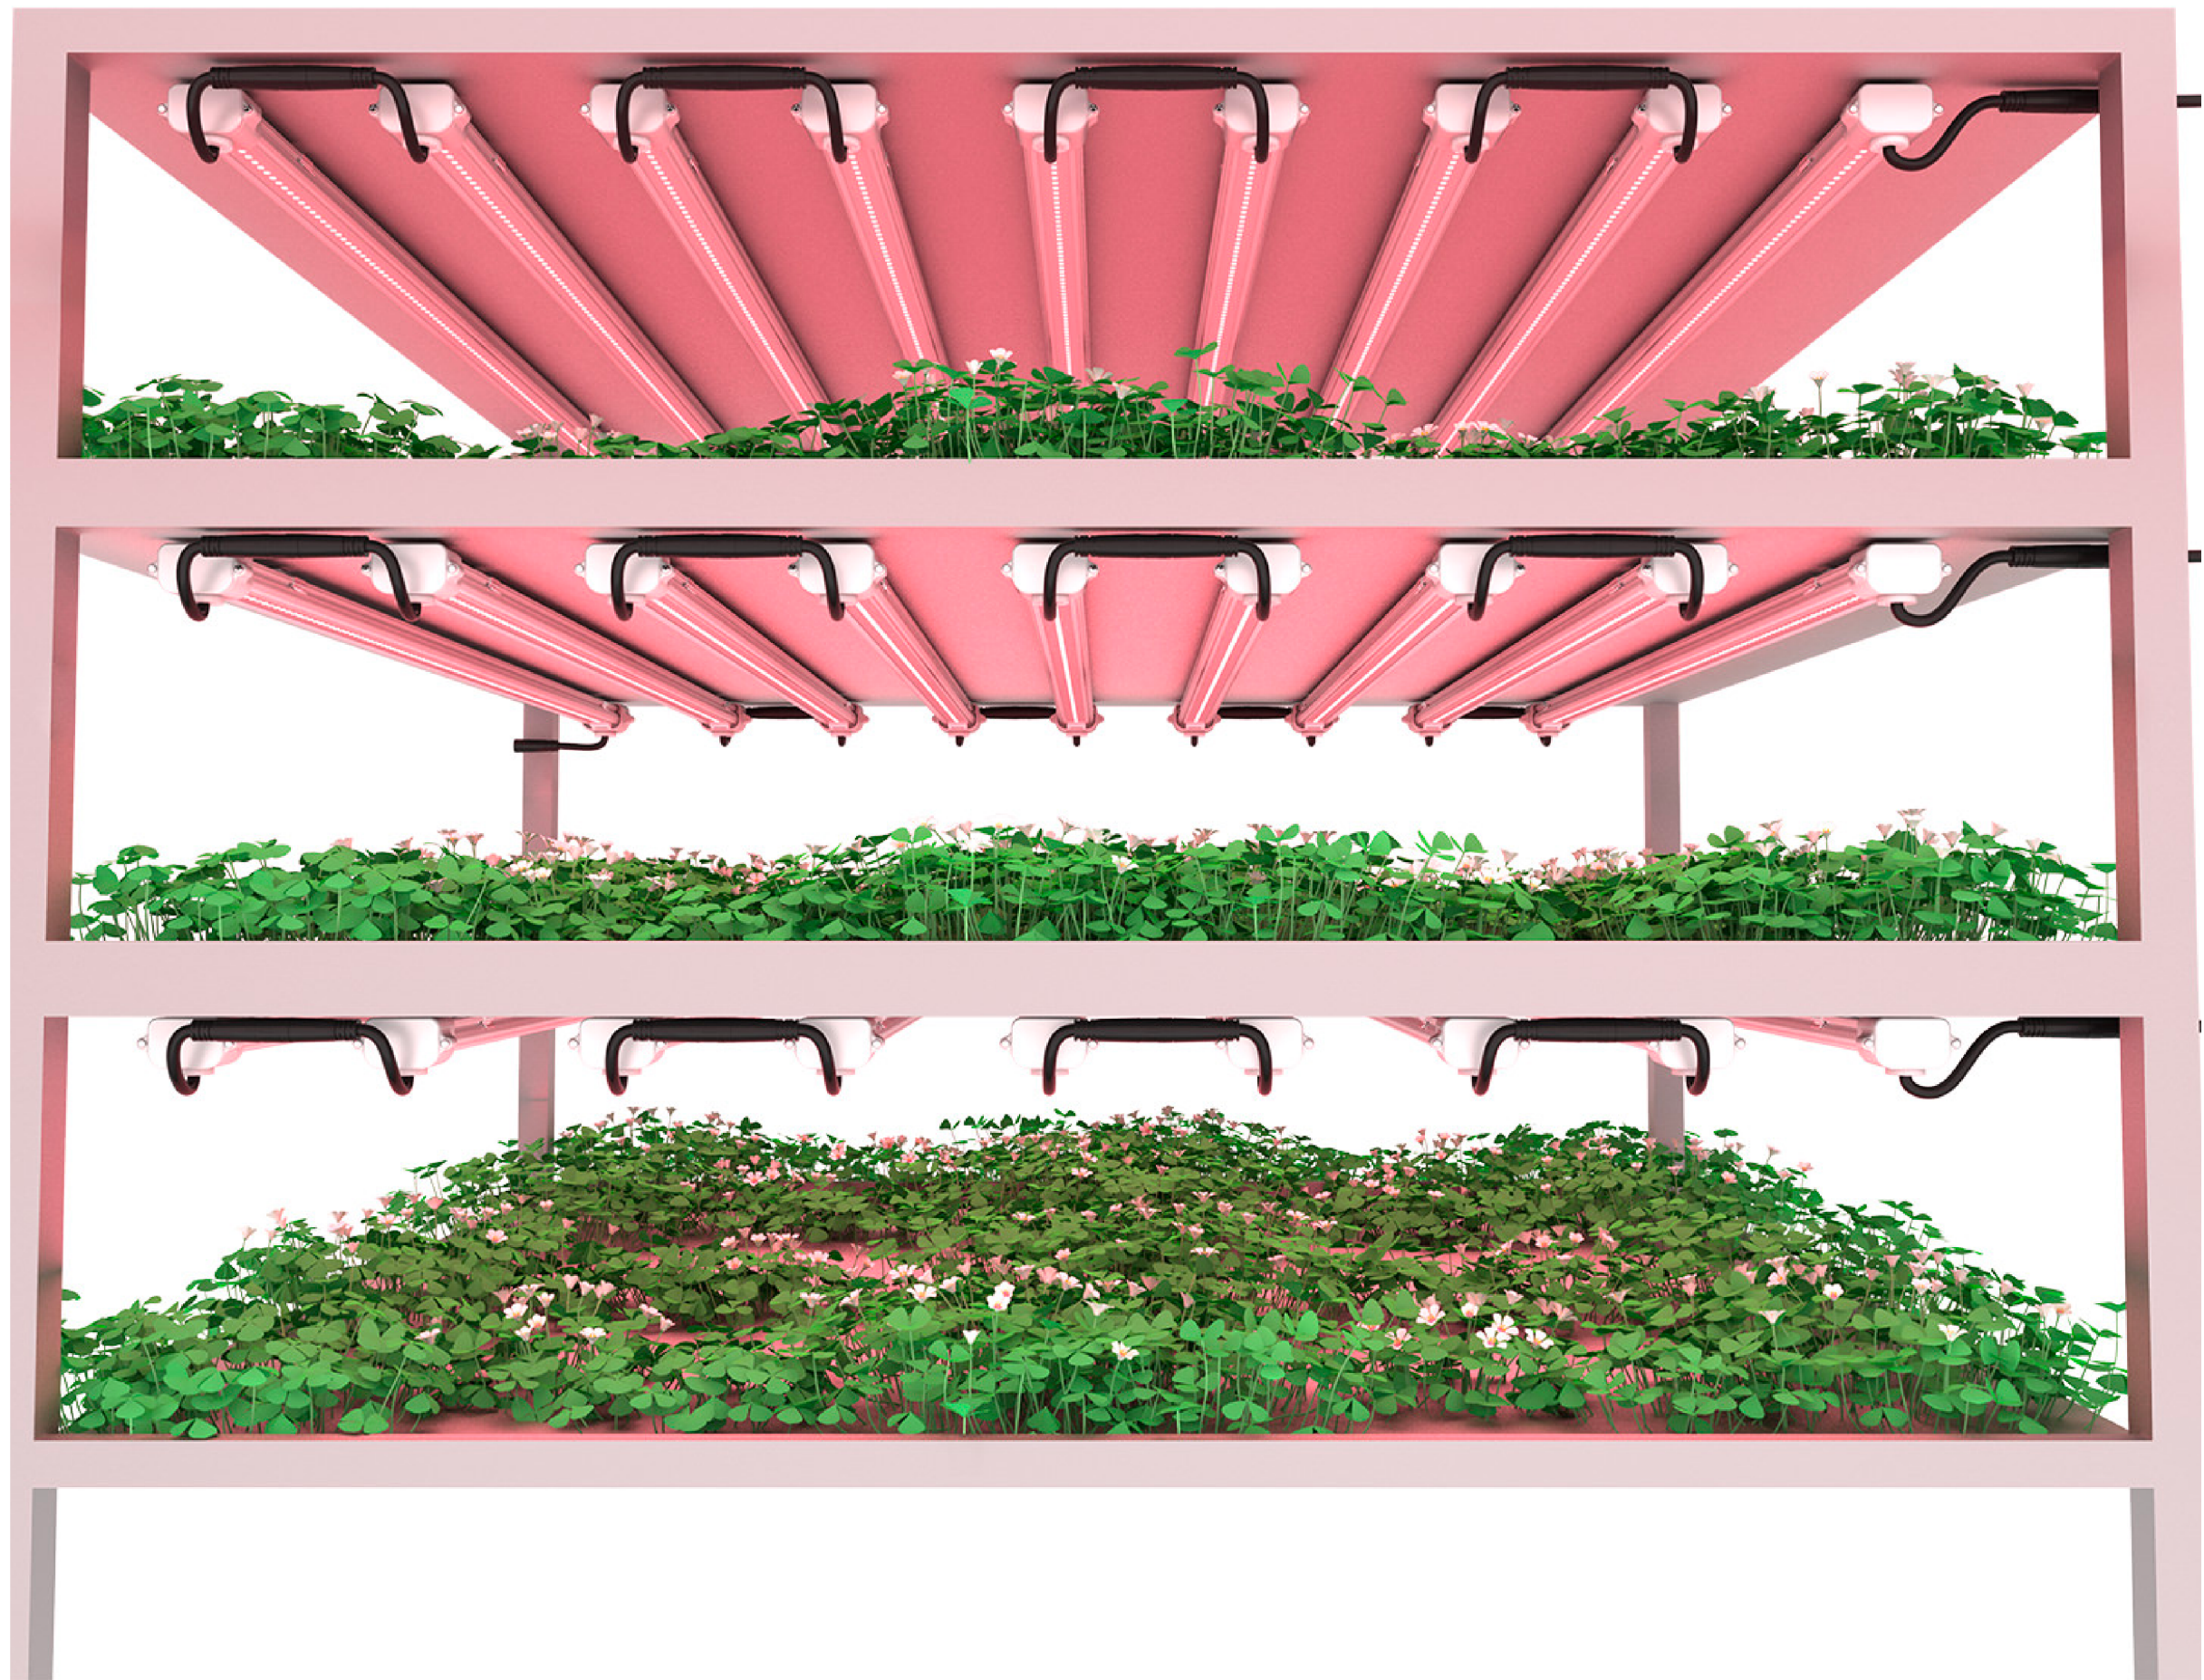

Contact Us

BOX BRIGHT GROUP CO.,LTD.

e-mail : sales.boviga@gmail.com

tel : 02-408-4236

FIRA LOVE PLANT

เหมาะสำหรับการปลูกกระยาสารท
ต้นกล้า, ระยะเวลาต้น

FIRA LOVE PLANT



โคมไฟ LED สำหรับปลูกต้นไม้

การปลูกพืชในแนวดิ่งและ Plant Factory ใช้ เลือกใช้โคมปลูกต้นไม้ รุ่น Fira เพื่อ ปลูกพืชชนิดใบ เช่น ผักใบเขียว โคลน กัญชา เพาะเมล็ด ส่งมอบสารอาหารที่พืช ต้องการ สามารถให้แสง ควบคุม อุณหภูมิ ความชื้น สร้างสภาพอากาศที่ เหมาะสมทั้งปีให้กับพืชของคุณ



Key Features of FIRA LED Vertical Lighting

Simple and stylish,
Ultra-slim design,
Light weight

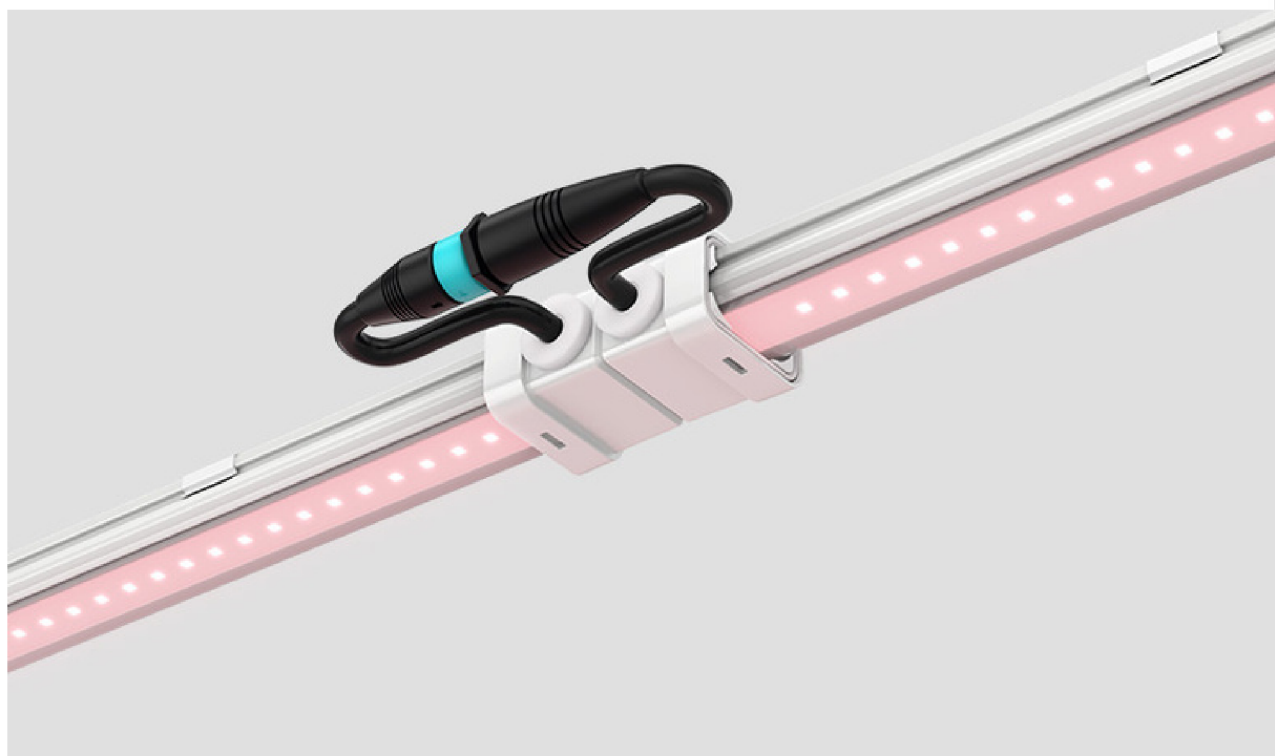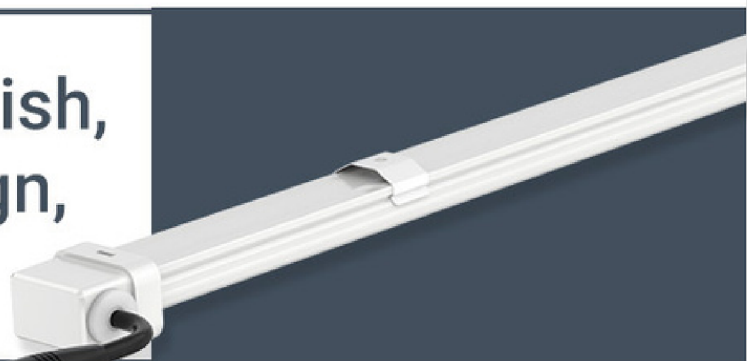


Linkable Design

Save cable cost and installation cost, easy to connect

	110V	220V		110V	220V
20W can link	30psc	60pcs	30W can link	20psc	40pcs

IP65 Waterproof Solution

Complete replacement of florescent
T5&T8 fixtures or HPS/metal halide lights

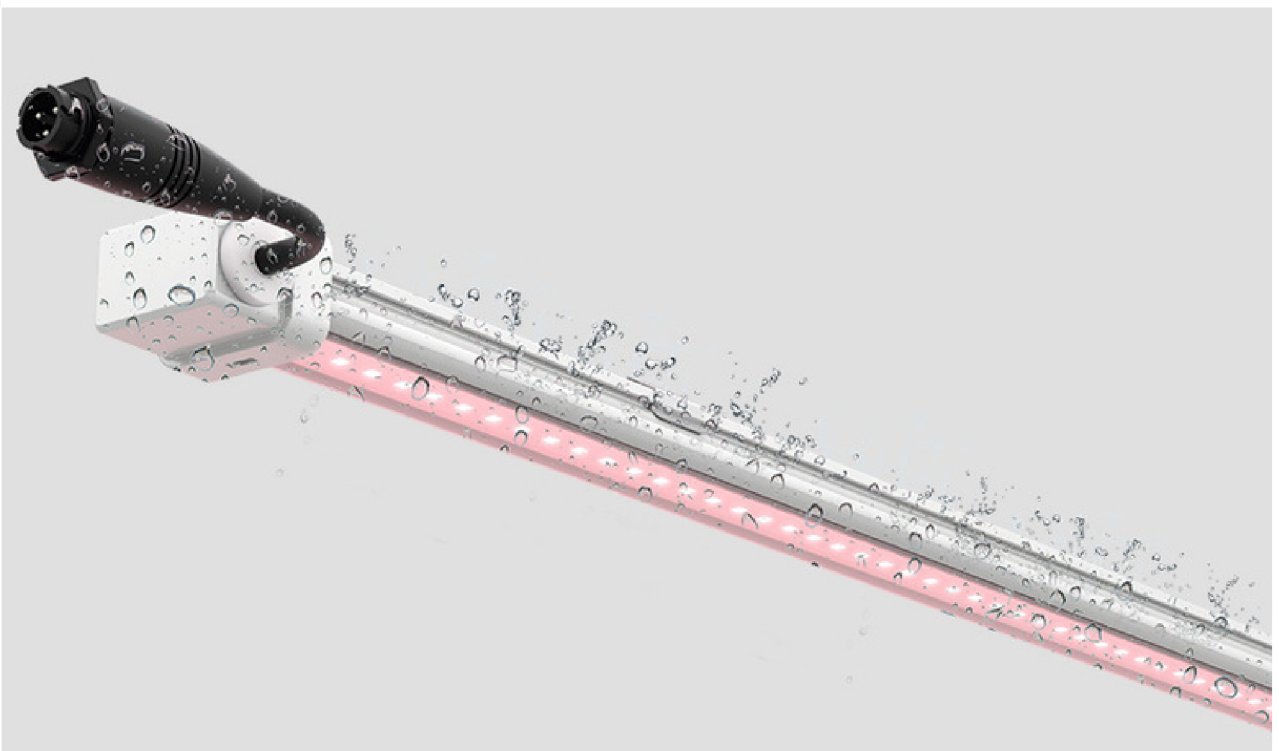

LED GROW LIGHT

FIRA SERIES




Technical data

Power (±3%)	30W
Item No.	LP-GL02A-30W
System efficacy	2.3μmol/J @230Vac
PPF Output	69μmol/s
Power Input	100-277Vac,50-60Hz
Current Range	0.3A @ 100V / 0.11A @ 277V
Isolation Class	Class I
Heat BTU Generated	102.3 BTU
Power Factor	>0.9
Dimming	No
Dimensions	1200 x 48 x 33mm
Net Weight	0.6±0.1kg
Operation conditions	0°C to 40°C (95% RH)
Storage conditions	-40°C to 70°C (85% RH)
Warranty	3 years
Certification	TIS1955/2551, DLC, ETL, CE, RoHs


Technical data

Housing material	Aluminum
Optics materials	Conformal coating (transmission >97%)
Radiation angle	120°
Protection degree	IP65 (dust and watertight)


Dimension

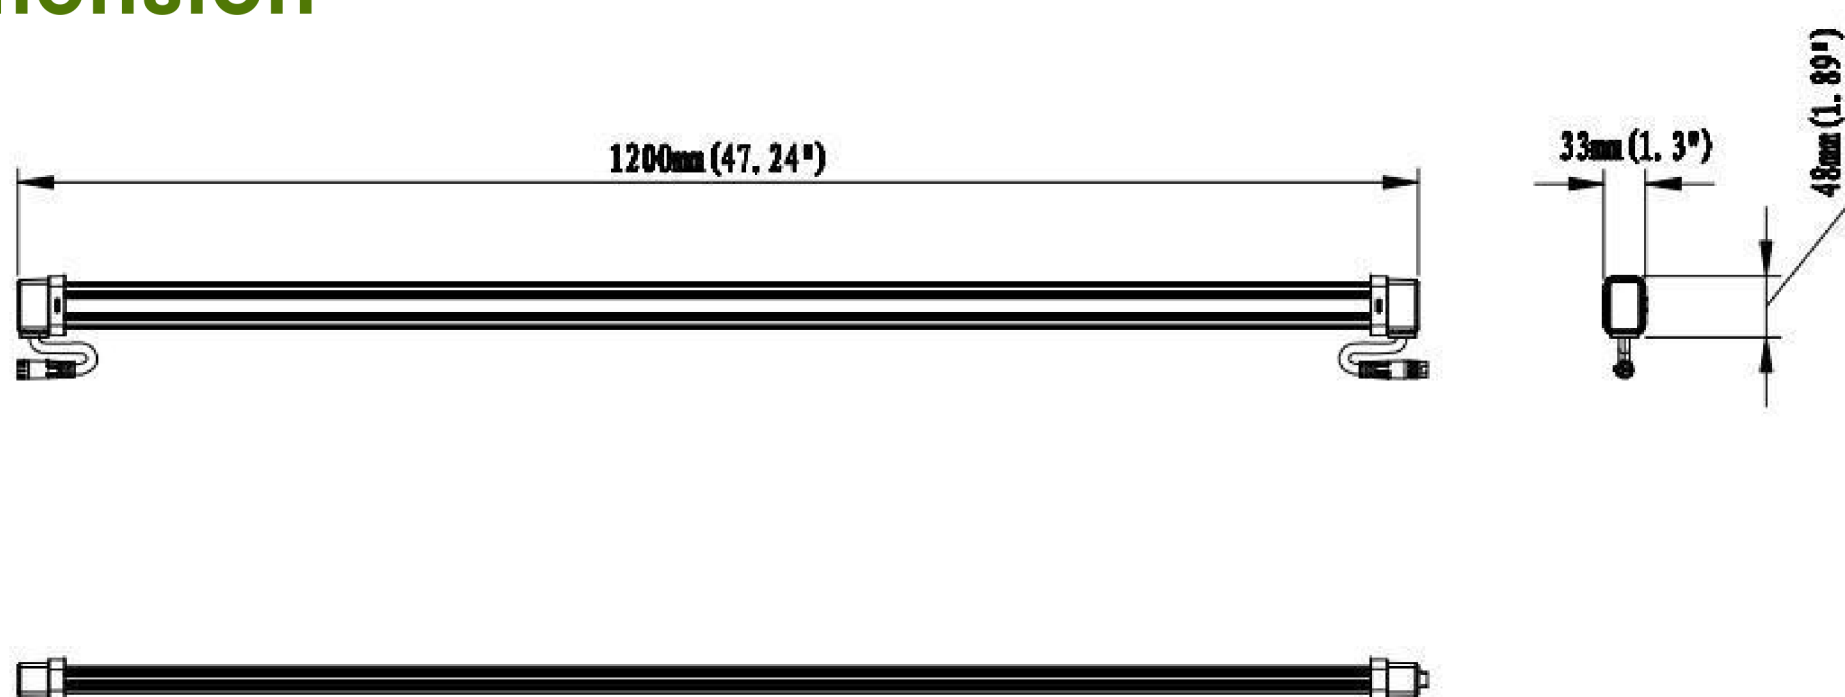

Horti Green Spectrum Chart

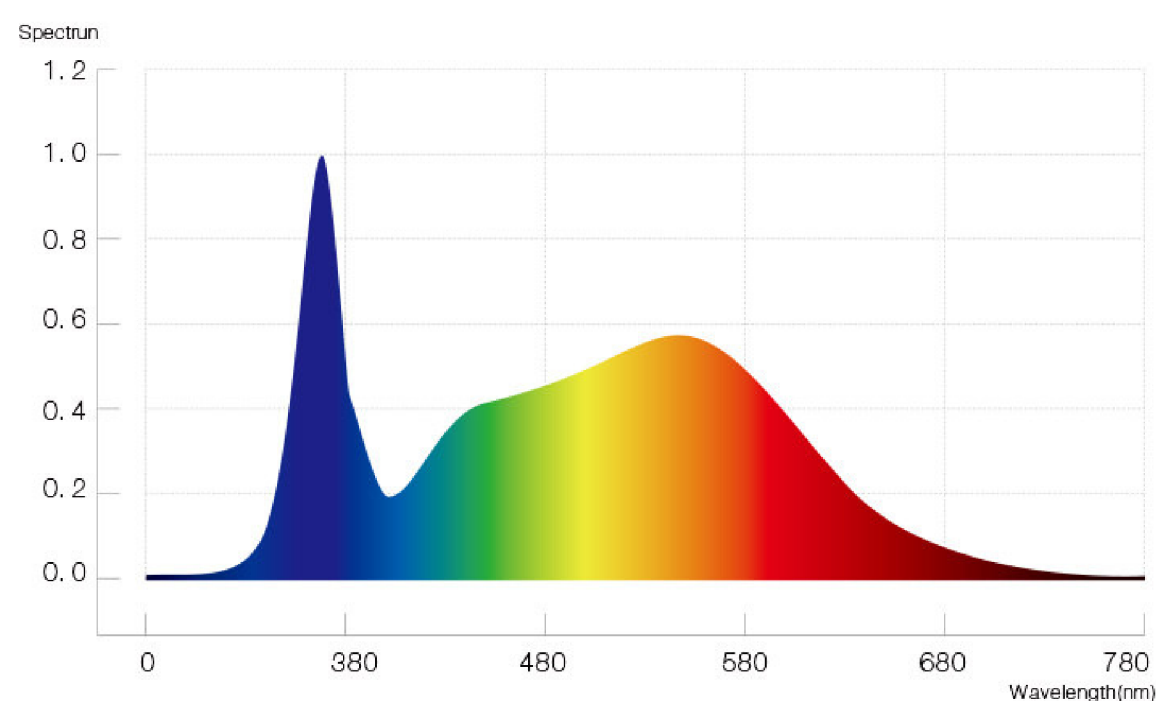

Horti Green IES test

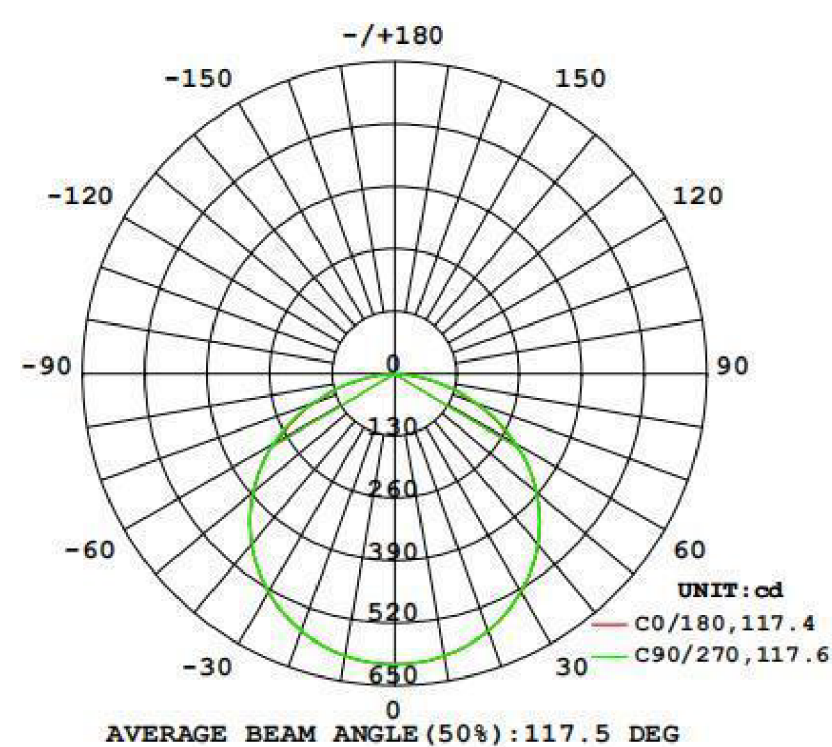

Accessories



Low bracket for surface
mounted * 2pcs



M12 AC wire* 1pc (3M)



M12 extension daisy chain
cable* 1pc (0.6M)